

Residential Door Seals



STARSEAL DB



TYPICAL APPLICATIONS

To door bottoms.
To meeting stiles of double doors.
To all sides of wicker doors.

FITTING DETAILS


Cut the strip to the required length, to fit inside at the bottom of the door (cut at the end with extra slots) seal the ends of Starseal DB with pliers and hammer, i.e. cut the carrier 5mm shorter than the width of the door. Slide the seal out of the carrier and cut 1mm from each end with pliers.

This will seal the inner carrier, preventing the bristles falling out. Slide the seal back and close the jaws on the carrier with a hammer. File off rough edges. Supplied in lengths of 0.914M. Also available in gold, silver, white and brown.

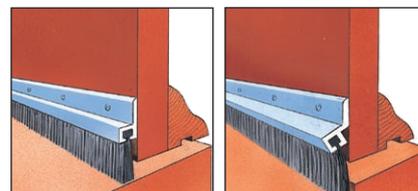

Tough aluminium carrier, straight or angled.

Resilient brush 30mm standard length.

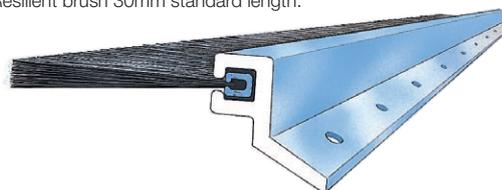

Pre-punched carrier for speedy installation.

LETTER BOX SEAL

PERFORMANCE BENEFITS

Two screw holes only - for speedy installation, (4 in double). Rigid back gives extra strength and barrier against draughts. The brush will always retain its original shape. Has countersunk screw holes-so that screws do not protrude outside carrier. Moulded carrier has fractional curve design to ensure snug fit on door after screws have been tightened home.



For horizontal and vertical letter box seals. Alternative Seal - includes: superior flapped letter box seal.



Supplied with and without flap in white or brown with black, single or double brush

ZERO GAP

Self adhesive window and door seal

- Completely enclosed
- Adhesive backed
- Quick installation

PERFORMANCE BENEFITS

Enclosed completely against the elements. Integral cord prevents stretching. Adhesive back gives firm fixing to wood and metal. Sheathing resists wear and protects against U.V. light, ozone and water. Centre core compresses to 1mm but recovers original shape. Quick installation, no curing time as with silicone




PRODUCT APPLICATION

Metal windows*
Timber casement windows
Timber and metal doors
Timber centre pivot windows*

PRODUCT SPECIFICATION

Supplied in coils of 100M in white, black and bronze. Adhesive backing is protected by peel-off strip.

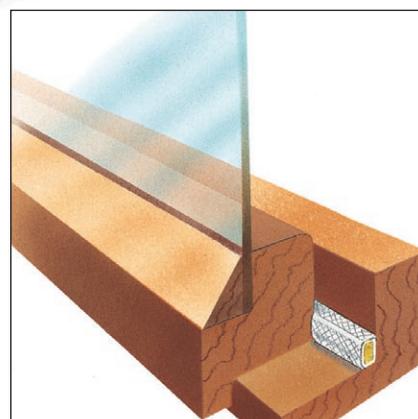

*Denotes to be used in conjunction with an adhesive primer recommended - 3M Scotch 83 Primer.