


Intumescent Fire & Smoke Seals



SEALMASTER PRODUCT DATA SHEET


Unique intumescent formulation

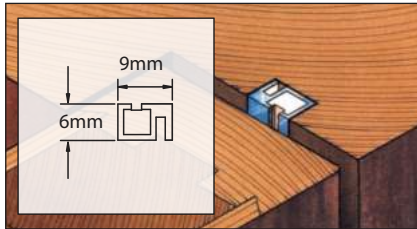

SEAL TYPE IF30

IF30 fire seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.


IF30 Intumescent Fire Seal has been tested by TRADA. A 30 minute fire-resistance rating was achieved, when used in conjunction with a 30 minute fire door. Copies of test reports are available on request.

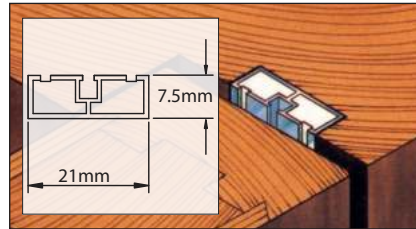

SEAL TYPE IF60

IF60 fire seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.


IF60 was tested by TRADA. It was fitted to a 60 minute door assembly and achieved an integrity rating of 71 minutes.

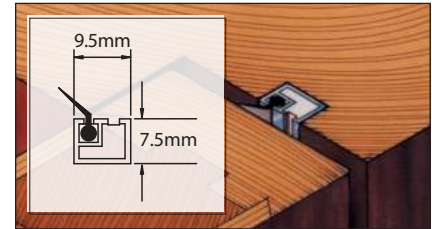

SEAL TYPE N30

N30 fire and smoke seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.


N30, fitted to a 30 minute fire door, was tested by TRADA. It retained stability, integrity and insulation well in excess of the 30 minute rating. Copies of test reports are available on request.

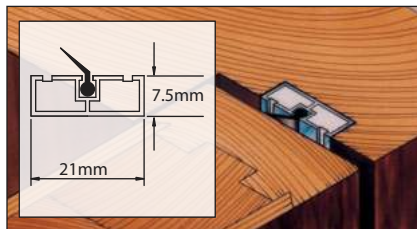

SEAL TYPE N60

N60 Fire and smoke seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.


N60, with flame-retardant elastomeric draught/smoke blade insert, was tested by TRADA, in conjunction with 60 minute assembly. Stability and integrity were retained for 71 minutes. Copies of test reports are available on request.

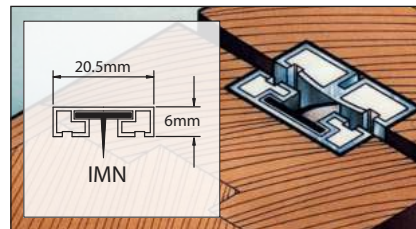

SEAL TYPE IMN/IMP

IMN/IMP fire and smoke seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.

An IMN/IMP combination seal with elastomeric blade insert, has been tested on a double leaf, timber door assembly, by TRADA. A fire resistance in excess of 60 minutes was achieved. Copies of test reports are available on request.

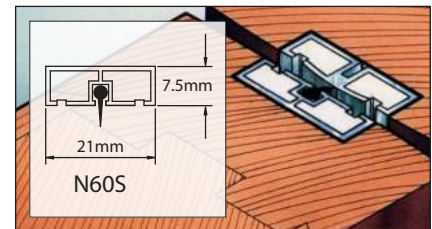

SEAL TYPE N60/IMP

N60/IMP fire and smoke seals have been tested and approved by Certifire to conform to BS476 part 22. This is the most demanding 3rd party certification scheme in the industry.

The N60S seal, has been assessed by TRADA, as being capable of providing 60 minutes integrity when used in conjunction with the IMP seal.

